


SiBoost Smart 3 Helix EXCEL 1004
: Standard-DEA

wilo

18/07/17

1 / 1

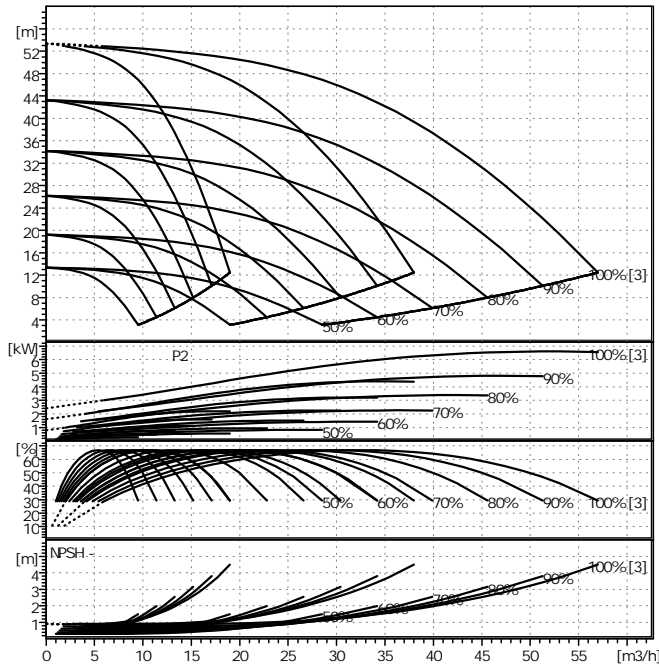

Данные среды

20 °C
0,9983 kg/dm³
1,005 mm²/s
0,02337 bar

Данные установки

WILO
SiBoost Smart 3 Helix EXCEL 1004

PN 16
Max. 3 °C
50 °C

Данные гидравлики

NPSH P2
m³/h
m
1/min
kW
m

Материалы

1.4301
1.4307
1.4307
1.4301
EPDM

Размеры

mm

H	1055	P	885	X	900			
H1	170	P1	704					
H3	90	P3	420					
Hp	920	P4	30					
L	1150	RPD	R 2?					
L1	300	RPS	R 2?					

R 2 1/2 / PN 16
R 2 1/2 / PN 16
238 kg

Данные мотора

2 3 x 2,2kW
2900 1/min
3-400 V, 50 Hz
3 x 4,8A
IP 55
+/- 10%

2536388

