
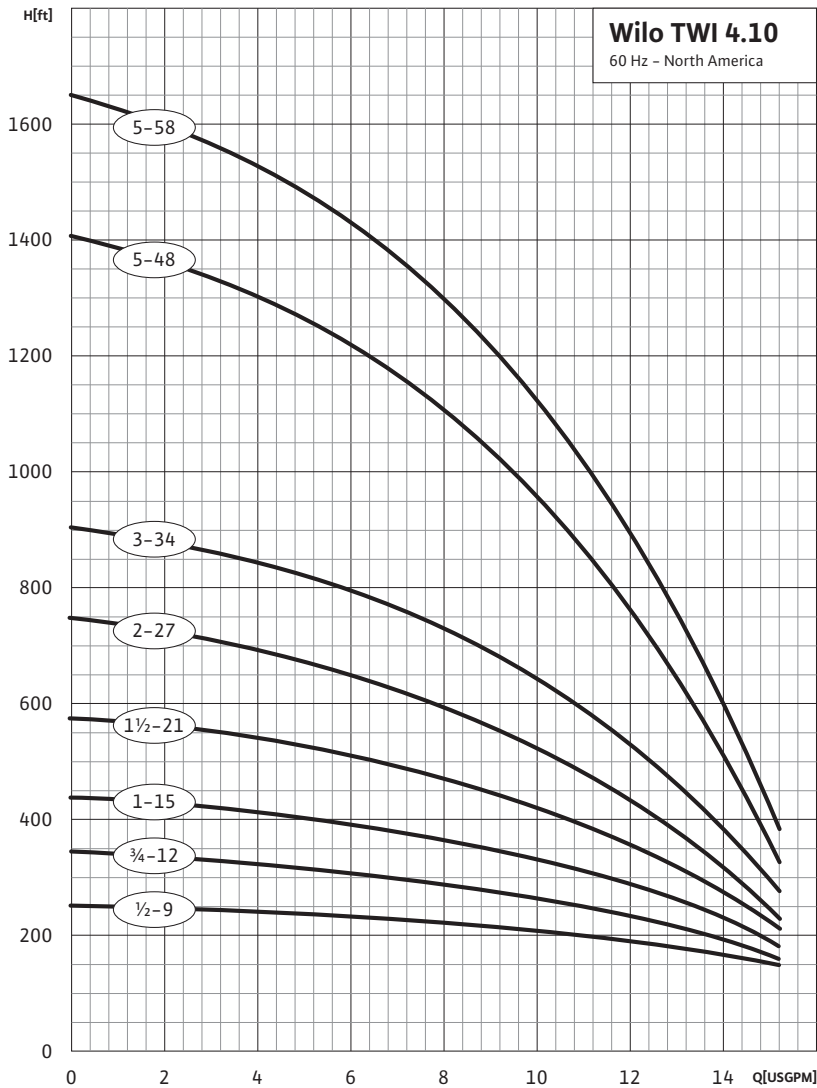


Submittal Data Sheet

Wilo TWI 4" Stainless Steel Submersibles - 10 GPM



TWI 4.10								
		Project:						
		Engineer:						
		Contractor:						
		Submitted By:					Date:	
		Approved By:					Date:	
Tag #	Model #	Flow	Head	HP	Wire	Phase	Volt	RPM



Materials of Construction	
Discharge	304 SS
Diffuser	304 SS
Impeller	304 SS
Split Cone	304 SS
Split Cone Nut	304 SS
Stop Ring	Carbon/Graphite/PTFE
Neck Ring Retainer	304 SS
Strainer	304 SS
Suction Interconnector	304 SS
Pump Shaft	304 SS
Coupling	304 SS
Strap	304 SS
Cable Guard	304 SS
Neck Ring	304 SS / NBR
Nut	304 SS
Bearing	NBR

Technical Data	
Available Voltages	1~ 115/230V 3~ 230/460/575V
Fluid temperature:	37°-86°F (3°-30°C)
Max. Head	1700 Ft.
Max. sand content:	50 ppm
Max. submersion depth:	1000 Ft.
Protection class:	IP 68

Approval Stamp Here


Submittal Data Sheet

Wilo TWI 4" Stainless Steel Submersibles - 10 GPM



TWI 4.10" Series

Weights and Dimensions													
Motor Type	Model	Dia. (in)	HP	PH	Volts	Dimensions (in)					Weights (lbs)		
						A	B	C	D	E	Complete Unit	Pump End	Motor
2 Wire	TWI4.10-9.05	3.9	½	1	115	25	11.0	14.0	1¼ NPT	3.9	27	7	20
	TWI4.10-9.05	3.9	½	1	230	25	11.0	14.0			27	7	20
	TWI4.10-12.07	3.9	¾	1	230	28.9	12.4	16.5			31	8	23
	TWI4.10-15.10	3.9	1	1	230	32.3	13.3	19.0			34	9	25
	TWI4.10-21.15	3.9	1½	1	230	38.8	14.9	23.9			42	12	30
3 Wire	TWI4.10-9.05	3.9	½	1	115	24	10.0	14.0	1¼ NPT	3.9	26	7	19
	TWI4.10-9.05	3.9	½	1	230	23.7	9.7	14.0			26	7	19
	TWI4.10-12.07	3.9	¾	1	230	27.3	10.8	16.5			30	8	22
	TWI4.10-15.10	3.9	1	1	230	30.7	11.7	19.0			34	9	25
	TWI4.10-21.15	3.9	1½	1	230	37.5	13.6	23.9			39	12	27
	TWI4.10-21.15	3.9	1½	3	230	35.6	11.7	23.9			35	12	23
	TWI4.10-21.15	3.9	1½	3	460	35.6	11.7	23.9			35	12	23
	TWI4.10-27.20	3.9	2	1	230	44	15.1	28.9			45	14	31
	TWI4.10-27.20	3.9	2	3	230	42.7	13.8	28.9			41	14	27
	TWI4.10-27.20	3.9	2	3	460	42.7	13.8	28.9			41	14	27
	TWI4.10-34.30	3.9	3	1	230	53.9	18.3	35.6			62	22	40
	TWI4.10-34.30	3.9	3	3	230	50.9	15.3	35.6			54	22	32
	TWI4.10-34.30	3.9	3	3	460	50.9	15.3	35.6			54	22	32
	TWI4.10-48.50	5.5	5	1	230	71.3	23.6	47.7			108	38	70
	TWI4.10-48.50	5.5	5	3	230	71.3	23.6	47.7			93	38	55
	TWI4.10-48.50	5.5	5	3	460	71.3	23.6	47.7			93	38	55
	TWI4.10-58.50	5.5	5	1	230	88.2	23.6	64.5			112	42	70
	TWI4.10-58.50	5.5	5	3	230	88.2	23.6	64.5			97	42	55
TWI4.10-58.50	5.5	5	3	460	88.2	23.6	64.5	97	42	55			

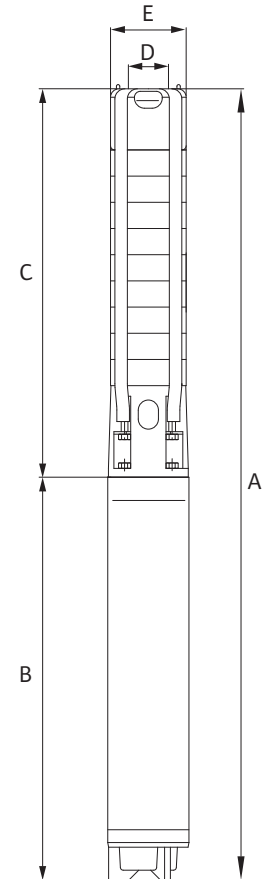

WILO USA LLC

Tel: (888) 945-6872 Web: www.wilo-usa.com
 Fax: (888) 945-6873 Email: info@wilo-usa.com

WILO Canada Inc.

Tel: (866) 945-6236 Web: www.wilo-canada.com
 Fax: (403) 277-9456 Email: info@wilo-canada.com

WILO Mexico

Tel: +52 55 5586 3209 Web: www.wilo-mexico.com.mx
 Fax: +52 1 55 5413 4165 Email: groundwater@wilo-usa.com