


Submittal Data Sheet

Wilco TWI 4" Stainless Steel Submersibles - 25 GPM



TWI 4.25

	Project:							
	Engineer:							
	Contractor:							
	Submitted By:						Date:	
	Approved By:						Date:	
Tag #	Model #	Flow	Head	HP	Wire	Phase	Volt	RPM

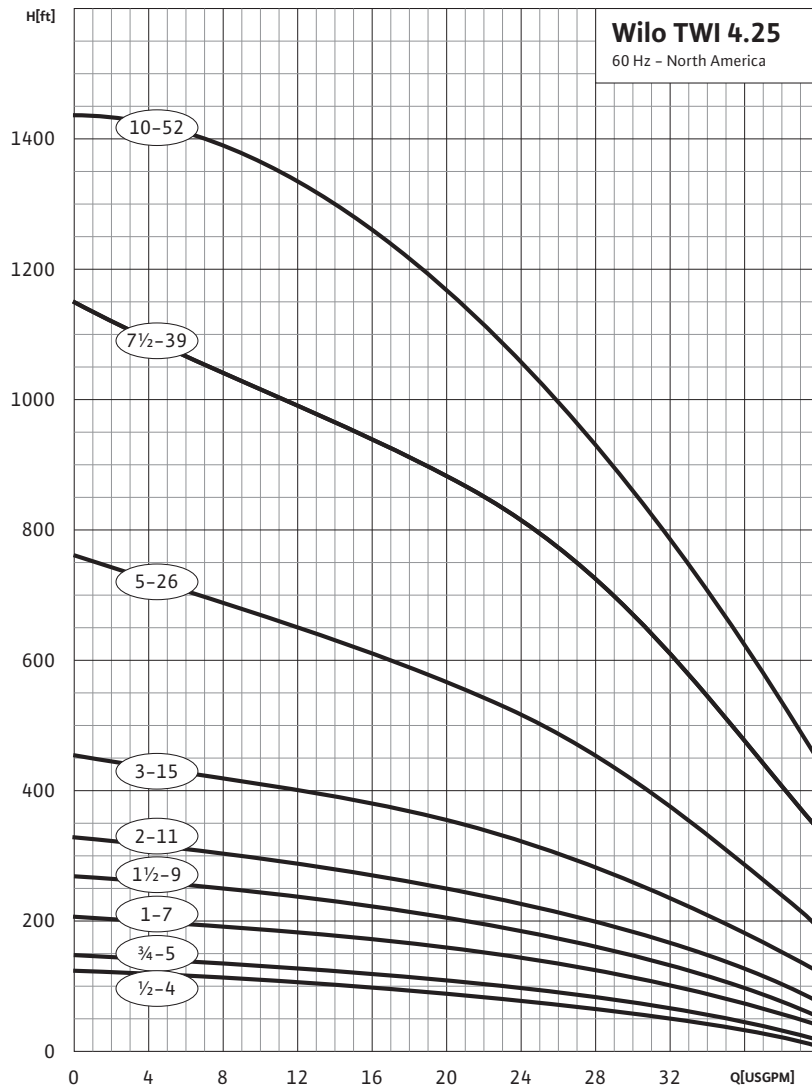

Materials of Construction

Discharge	304 SS
Diffuser	304 SS
Impeller	304 SS
Split Cone	304 SS
Split Cone Nut	304 SS
Stop Ring	Carbon/Graphite/PTFE
Neck Ring Retainer	304 SS
Strainer	304 SS
Suction Interconnector	304 SS
Pump Shaft	304 SS
Coupling	304 SS
Strap	304 SS
Cable Guard	304 SS
Neck Ring	304 SS / NBR
Nut	304 SS
Bearing	NBR

Technical Data

Available Voltages	1~ 115/230V 3~ 230/460/575V
Fluid temperature:	37°-86°F (3°-30°C)
Max. Head	1425 Ft.
Max. sand content:	50 ppm
Max. submersion depth:	1000 Ft.
Protection class:	IP 68

Approval Stamp Here


Submittal Data Sheet

Wilo TWI 4" Stainless Steel Submersibles - 25 GPM



TWI 4.25" Series

Weights and Dimensions													
Motor Type	Model	Dia. (in)	HP	PH	Volts	Dimensions (in)					Weights (lbs)		
						A	B	C	D	E	Complete Unit	Pump End	Motor
2 Wire	TWI4.25-4.05	3.9	½	1	115	20.9	11.0	9.9	1½ NPT	3.9	25	5	20
	TWI4.25-4.05	3.9	½	1	230	20.9	11.0	9.9			25	5	20
	TWI4.25-5.07	3.9	¾	1	230	23.1	12.4	10.7			29	5	23
	TWI4.25-7.10	3.9	1	1	230	25.7	13.3	12.4			32	6	25
	TWI4.25-9.15	3.9	1½	1	230	28.9	14.9	14.0			39	7	30
3 Wire	TWI4.25-4.05	3.9	½	1	115	19.9	10.0	9.9	1½ NPT	3.9	24	5	19
	TWI4.25-4.05	3.9	½	1	230	19.6	9.7	9.9			24	5	19
	TWI4.25-5.07	3.9	¾	1	230	21.5	10.8	10.7			28	5	22
	TWI4.25-7.10	3.9	1	1	230	24.1	11.7	12.4			32	6	25
	TWI4.25-9.15	3.9	1½	1	230	27.6	13.6	14.0			36	7	27
	TWI4.25-9.15	3.9	1½	3	230	25.7	11.7	14.0			32	7	23
	TWI4.25-9.15	3.9	1½	3	460	25.7	11.7	14.0			32	7	23
	TWI4.25-11.20	3.9	2	1	230	30.7	15.1	15.6			41	8	31
	TWI4.25-11.20	3.9	2	3	230	29.4	13.8	15.6			37	8	27
	TWI4.25-11.20	3.9	2	3	460	29.4	13.8	15.6			37	8	27
	TWI4.25-15.30	3.9	3	1	230	37.3	18.3	19.0			53	9	40
	TWI4.25-15.30	3.9	3	3	230	34.3	15.3	19.0			45	9	32
	TWI4.25-15.30	3.9	3	3	460	34.3	15.3	19.0			45	9	32
	TWI4.25-26.50	3.9	5	1	230	56	27.7	28.3			84	14	70
	TWI4.25-26.50	3.9	5	3	230	50	21.7	28.3			69	14	55
	TWI4.25-26.50	3.9	5	3	460	50	21.7	28.3			69	14	55
	TWI4.25-39.75	3.9	7½	3	230	66.8	27.7	39.1			95	25	70
	TWI4.25-39.75	3.9	7½	3	460	66.8	27.7	39.1			95	25	70
	TWI4.25-52.100	5.5	10	3	460	90.9	25.4	65.5			142	47	95

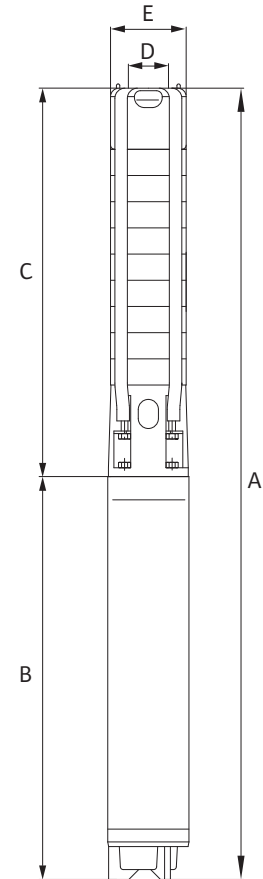

WILO USA LLC

Tel: (888) 945-6872 Web: www.wilo-usa.com
 Fax: (888) 945-6873 Email: info@wilo-usa.com

WILO Canada Inc.

Tel: (866) 945-6236 Web: www.wilo-canada.com
 Fax: (403) 277-9456 Email: info@wilo-canada.com

WILO Mexico

Tel: +52 55 5586 3209 Web: www.wilo-mexico.com.mx
 Fax: +52 1 55 5413 4165 Email: groundwater@wilo-usa.com