
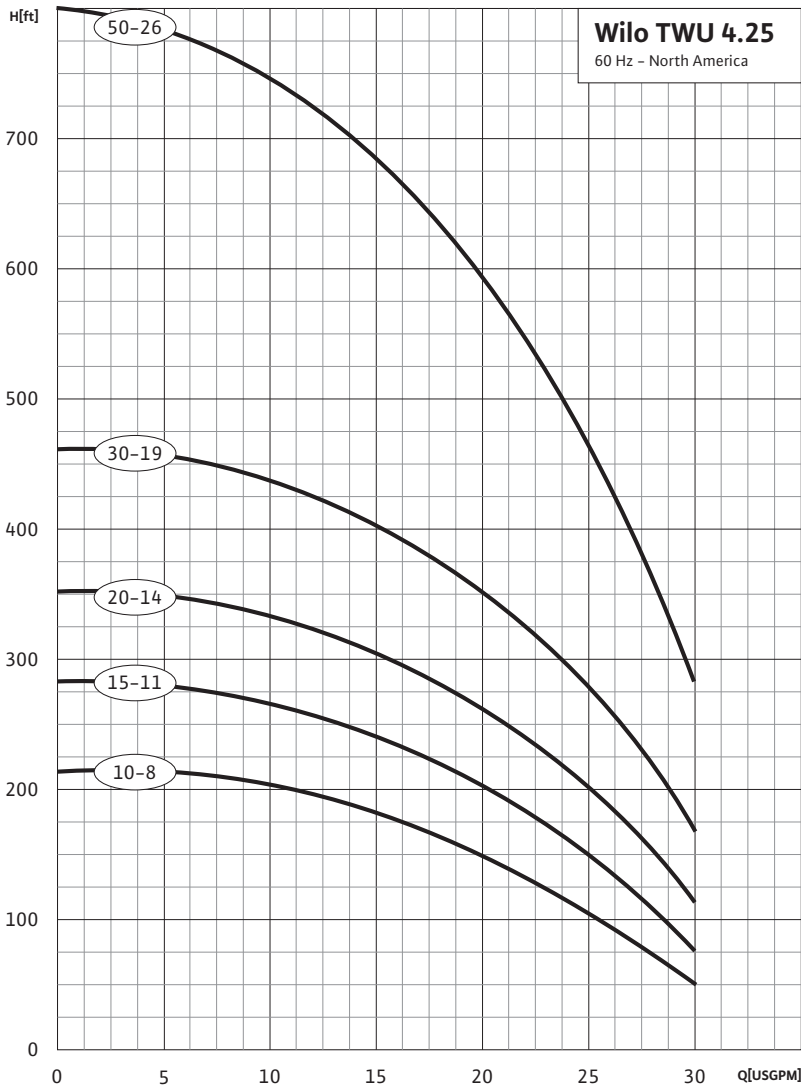


# Submittal Data Sheet



Wilco TWU - 4" 25 GPM Stainless Steel Submersibles with Noryl Impellers

<b>TWU 4.25</b>								
		Project:						
		Engineer:						
		Contractor:						
		Submitted By:				Date:		
		Approved By:				Date:		
Tag #	Model #	Flow	Head	HP	Wire	Phase	Volt	RPM



### Materials of Construction

Discharge Head	304 SS
Check Valve Cone	304 SS
Check Valve retaining Ring	304 SS
Bearing Spider	Glass-Filled Polycarbonate
Diffuser	Glass-Filled Polycarbonate
Bowl	304 SS
Impeller	Noryl
Strainer	304 SS
Pump Shaft/Coupling	304 SS
Shaft Sleeve	Noryl
Pump Casing	304 SS
Cable Guard	304 SS
O-Ring	NBR
Bearing	Polyacetal

### Technical Data

Connection:	1~ 230V 3~ 230/460/575V
Fluid temperature:	37°-95°F (3°-35°C)
Max. Head	1150 Ft.
Max. sand content:	50 ppm
Max. submersion depth:	800 Ft.
Protection class:	IP 68

Approval Stamp Here


# Submittal Data Sheet

Wilo TWU - 4" 25 GPM Stainless Steel Submersibles with Noryl Impellers



## TWU 4.25" Series

Weights and Dimensions													
Motor Type	Model	Dia. (in)	HP	PH	Volts	Dimensions (in)					Weights (lbs)		
						A	B	C	D	E	Complete Unit	Pump End	Motor
2 Wire	TWU 4.25-07.10	3.9	1	1	230	26.7	13.3	13.4	1½ NPT	3.9	33	8	25
	TWU 4.25-09.15	3.9	1½	1	230	30.2	14.9	15.3			39	9	30
3 Wire	TWU 4.25-07.10	3.9	1	1	230	25.1	11.7	13.4	1½ NPT	3.9	33	8	25
	TWU 4.25-07.10	3.9	1	3	230	25.1	11.7	13.4			33	8	25
	TWU 4.25-07.10	3.9	1	3	460	25.1	11.7	13.4			33	8	25
	TWU 4.25-09.15	3.9	1½	1	230	28.9	13.6	15.3			36	9	27
	TWU 4.25-09.15	3.9	1½	3	230	27	11.7	15.3			32	9	23
	TWU 4.25-09.15	3.9	1½	3	460	27	11.7	15.3			32	9	23
	TWU 4.25-11.20	3.9	2	1	230	32.3	15.1	17.2			41	10	31
	TWU 4.25-11.20	3.9	2	3	230	31	13.8	17.2			37	10	27
	TWU 4.25-11.20	3.9	2	3	460	31	13.8	17.2			37	10	27
	TWU 4.25-15.30	3.9	3	1	230	39.2	18.3	20.9			54	14	40
	TWU 4.25-15.30	3.9	3	3	230	36.2	15.3	20.9			46	14	32
	TWU 4.25-15.30	3.9	3	3	460	36.2	15.3	20.9			46	14	32
	TWU 4.25-26.50	3.9	5	1	230	61.1	27.7	33.4			91	21	70
	TWU 4.25-26.50	3.9	5	3	230	55.1	21.7	33.4			76	21	55
	TWU 4.25-26.50	3.9	5	3	460	55.1	21.7	33.4			76	21	55

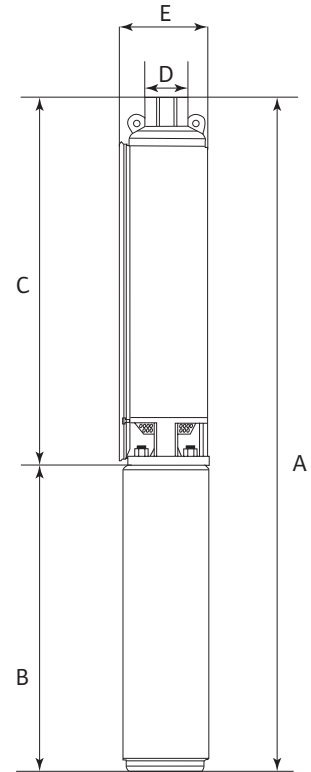

WILO USA LLC

Tel: (888) 945-6872 Web: [www.wilo-usa.com](http://www.wilo-usa.com)  
 Fax: (888) 945-6873 Email: [info@wilo-usa.com](mailto:info@wilo-usa.com)

WILO Canada Inc.

Tel: (866) 945-6236 Web: [www.wilo-canada.com](http://www.wilo-canada.com)  
 Fax: (403) 277-9456 Email: [info@wilo-canada.com](mailto:info@wilo-canada.com)

WILO Mexico

Tel: +52 55 5586 3209 Web: [www.wilo-mexico.com.mx](http://www.wilo-mexico.com.mx)  
 Fax: +52 1 55 5413 4165 Email: [groundwater@wilo-usa.com](mailto:groundwater@wilo-usa.com)