

# Submittal Data Sheet

Wilo-SIBOOSTER EXCEL - NSF 61/372 Pressure Boosting System



## SIBOOSTER-4 EXCEL V110-03-1/5.7/VCE




|               |       |
|---------------|-------|
| Project:      |       |
| Engineer:     |       |
| Contractor:   |       |
| Submitted By: | Date: |
| Approved By:  | Date: |

| Tag # | Model #                             | Flow | BOOST PSI | Min. Inlet PSI | HP/Pump | Phase | Voltage | RPM  |
|-------|-------------------------------------|------|-----------|----------------|---------|-------|---------|------|
|       | SIBOOSTER-4 EXCEL V110-03-1/5.7/VCE |      |           |                | 5.7     |       |         | 3600 |

### Article Number: 2701053

SiBoost 4 EXCEL 110-03/5.7

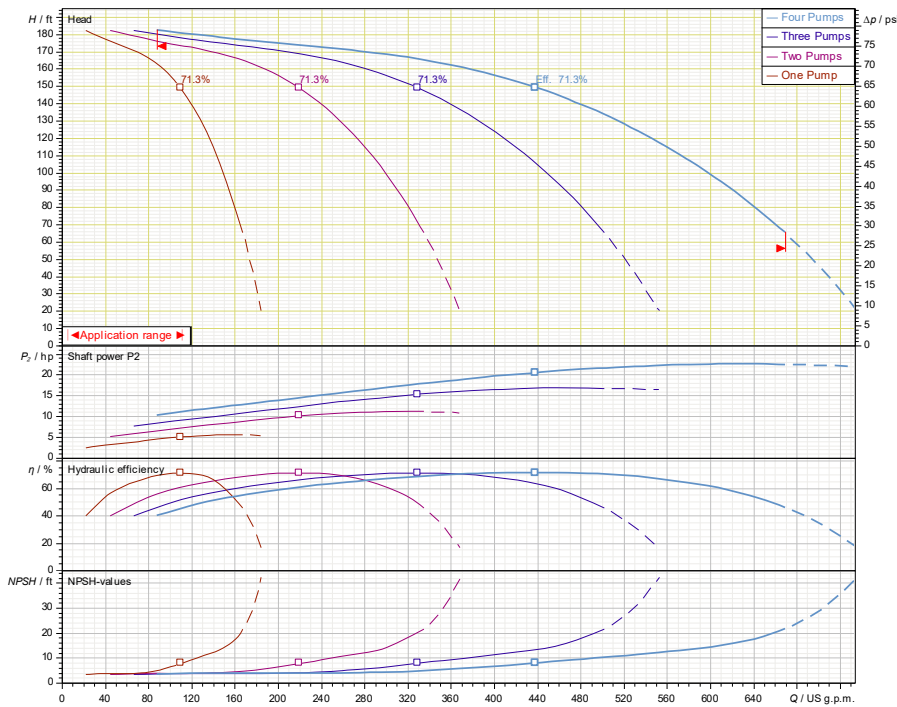

### Applications

- Water Supply
- Pressure Boosting
- Agriculture
- Cooling Circuits
- Washing / Sprinkling Systems
- Condensate Return

### Materials of Construction

|                             |   |
|-----------------------------|---|
| Pump Volute                 | AISI304 stainless steel with ANSI flanges   |
| Impeller                    | 3D Laser welded AISI 304 Stainless Steel  |
| Shaft                       | AISI304, AISI318 LN, or AISI431 Stainless Steel   |
| Elastomers                  | EPDM  |
| Isolation Valves            | 304 Stainless Steel Ball Valves   |
| Suction/Discharge Manifolds | AISI304 Stainless Steel with Grooved System Connections   |
| Check Valves                | Wafer Style, 316 Stainless Steel internals, Non-slam, Plunger-type with EPDM seal/ Cast Iron Body |
| Mechanical Seal             | Cartridge Seal: Sleeve AISI316L / Spring Clips AISI304  |
| Pressure Transducers        | 316 Stainless Steel   |
| Pressure Guages             | 304 Stainless Steel Housing with 316 Stainless Steel wetted parts                                 |
| System base                 | Steel (S235JR)  |
| Vibration Isolators         | Neoprene, Height Adjustable   |

### Technical Data - Operational Ranges

|                     |  |
|---------------------|--|
| Liquid Temp Range   | -4°F to +248°F (Min. 32 °F for Domestic Water) |
| Ambient Temp Range  | +32°F to +104 °F                               |
| Max Inlet Pressure  | 145 PSI  |
| Max System Pressure | 232 PSI  |

### Technical Data - Panel

|              |                                     |
|--------------|-------------------------------------|
| Power Supply | 460~3                               |
| Enclosure    | NEMA 12 (3R Available Upon Request) |
| Standard     | Meets UL 508A                       |

### Technical Data - PLC

|                           |  |
|---------------------------|--|
| User Interface            | 7" Diagonal Color LCD Touchscreen                                    |
| Display Resolution        | 800 x 480 Pixels   |
| Supply Voltage            | 24VDC  |
| Max. Current Consumption  | 320mA@24V  |
| Number of Analog Inputs   | 9  |
| Number of Analog Outputs  | 2  |
| Number of Digital Inputs  | 18   |
| Number of Digital Outputs | 17   |
| Onboard Communications    | Modbus Protocol (Optional Gateways for BacNET, LonWorks, and CANbus) |
| Ethernet Port             | RJ45 port capable of transmitting data 10/100Mbps                    |
| Additional Ports          | 2.0 USB Port; Micro-SD Port  |

### Motor Data

|                        |  |
|------------------------|--|
| Power Supply           | 460V-3   |
| Motor Enclosure        | Totally Enclosed Fan Cooled (TEFC)   |
| Motor Efficiency       | IEC Premium Efficiency (IE5) - Electronically Commutated Motor (EC Motor with Powerhead control) |
| Enclosure Construction | Cast Iron  |
| Motor Protection Index | IP55   |
| Insulation Class       | F  |

Approval Stamp


# Submittal Data Sheet

Wilo-SIBOOSTER EXCEL - NSF 61/372 Pressure Boosting System



## SIBOOSTER-4 EXCEL V110-03-1/5.7/VCE

460 V~3

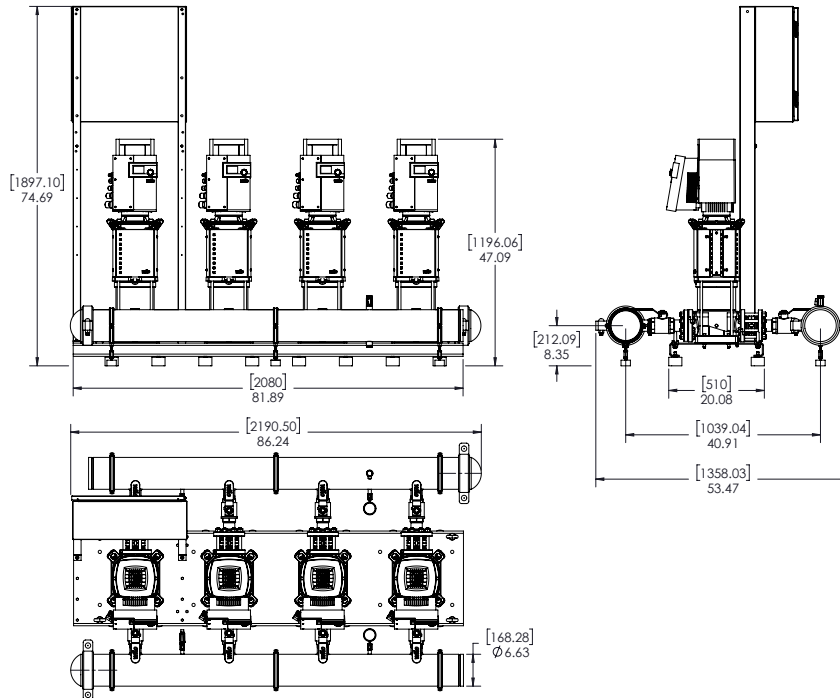

Special Note: All weights and dimensions are approximate and should not be used as exact rough-in dimensions

### Dimensions and Weights

| Model                               | Voltage (V) | Dimensions-inches |         |         |                    |  |                |                     | Individual Pump Weight                        |                   | Package Weight       |
|-------------------------------------|-------------|-------------------|---------|---------|--------------------|--|----------------|---------------------|---|-------------------|----------------------|
|                                     |             | H (in)            | W (in)  | L (in)  | System Header Size | Suction / Discharge Pump Size (300 Class ANSI) | Gauge Tap Size | Transducer Tap Size | Hydronumatic Tank Valve on Manifold (Plugged) | Pump Weight (lbs) | Package Weight (lbs) |
| SIBOOSTER-4 EXCEL V110-03-1/5.7/VCE | 460 V       | 74-11/16          | 86-3/16 | 53-7/16 | 6" GROOVED         | 2"   | 1/4" FNPT      | 1/4" FNPT           | 3/4" MNPT x 3/4" FNPT                         | 185               | 1,422                |

### EC Motor Data (Single Motor Operation)

| Model                               | P2 (HP) | Phase (-) | Voltage (V) | FLA (per pump) (A) | Efficiency ηm 100% | Pmax (PSI) |
|-------------------------------------|---------|-----------|-------------|--------------------|--------------------|------------|
| SIBOOSTER-4 EXCEL V110-03-1/5.7/VCE | 5.7     | 3         | 460 (±10%)  | 6.5                | 95.8               | 232        |